

Potential of Phytoremediation for dairy wastewater treatment

Bhavsar Swati R.¹, Pujari Vedavati R.², Dr.Diwan V.V.³

1.(Environmental Engg. Dept., Walchand college of Engineering ,Sangli ,India)

2.(Environmental Engg. Dept., Walchand college of Engineering ,Sangli ,India)

3. (B.E. Civil, M.B.A., Ph.D. M.I.E., Chartered Engineer, F.I.V. Lecturer Selection Grade + Training & Placement Officer Kolhapur, India)

ABSTRACT: Dairy industry is considered to be largest source of food processing wastewater in many countries. Huge amount of water is used during processing of milk, this result in generation of high volume of effluent containing dissolved sugars, proteins, fats etc. which are mainly organic in nature. Thus dairy effluent is characterized by high concentration of organic matter, high BOD. Effluent with such characteristics cannot be used for land irrigation purpose and cannot be discharged into public sewer /surface water. Thus proper treatment of dairy wastewater is necessary before disposal. Dairy wastewater is readily biodegradable, can be treated easily with conventional treatment techniques like ASP, trickling filter, waste stabilization pond, etc. But conventional treatment has limitations like High cost of o & m, Requirement of technically skilled labours. Disposal problem of biological sludge (i.e. hazardous waste) etc. Hence there is need for developing low cost technique for dairy wastewater treatment.

Phytoremediation is one of such techniques which is defined as use of plants , micro-organisms to remove harmless pollutants from contaminated water. In this study an attempt is be made to assess efficiency, suitability of aquatic plants like water hyacinth, duckweed to treat dairy wastewater. Aquatic plants have drawn attention because of rapid growth, High biomass production and capability to remove varieties of pollutants from domestic and industrial effluents. They have the ability to remove even nutrients and other chemical elements from sewage and industrial effluents.

Keywords: COD ,Phytoremediation, USAB ,water hyacinth

1. Introduction

1.1 Gokul Milk Project

Gokul milk project was established in November 1985. This project was financed & constructed by national dairy development board. Kolhapur Zilla Sahakari Dudh Utpadak Sangh Ltd., Kolhapur which is the parents organization was established on 16th March 1963 under co-operative societies act.

Actually Gokul Milk project was started on 18th November 1985. Now Gokul Milk project is collection 7,00,000 lit. of milk per day from 3000 milk society. It is located on industrial area of Gokul Shirgaon, which is at south of Kolhapur. The address of milk dairy is Kolhapur Zillah Sahakari Dhudh Utpadak Sangh Ltd., Dist. Kolhapur 416234

Table 1.1 Gokul's present set up


A)	Milk Reception Capacity	3.2 Lakh Litres/Day (Raw) 3.8 Lakh Litres/Day Lakh(Chilled)
B)	Milk Process capacity	7.0 Lakh Litres/Day
C)	Powder Manufacturing	40 MT/Day
D)	Butter Manufacturing	
	Top Churn	8 MT/Day
E)	Ghee Manufacturing	6 MT/Day
F)	Packaging Lines	
	Milk Packaging	1 Lakh Litre/day
	Powder Packing-Nichrome (Pouch)	10 MT/day
	Ghee Packaging (Pouch)	4.5 MT/Day
	Table Butter Packaging	
	In 500 gm	3 MT/day
G)	Storage Capacity	
	Milk (Packed Milk)	1 Lakh Litre

Butter	800 MT
Ghee	20 MT to 30 MT

1.2 Manufacturing process at Gokul dairy

Manufacturing process of dairy was study in detail which is presented as follows

Fig. 1.1 Flow Diagram of Manufacturing Process:

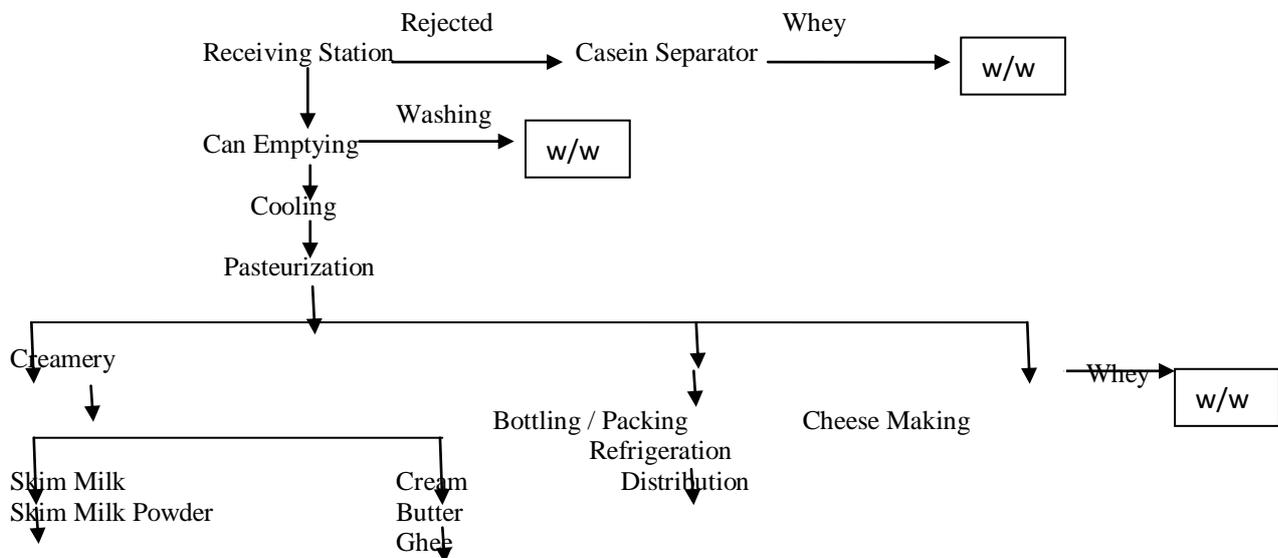

1.3 Water Requirement:

Details of water requirement for dairy is as follows-

- Source of Water Supply –M.I.D.C. Water supply scheme.
- Water Requirement -
 - Water Reservoirs –6 lakh liters. 2 nos.
 - Pumped to Overhead Tank of 1 lakh liters. & distributed to entire Dairy Premises by gravity.
 - Daily water consumption: 1120 m³ (collected from dairy)
 - Water Requirement / Lit. Of Milk Handled: 1.6lit.
 - Cost of Water : Rs.13.50/ m³

1.4 Wastewater generation

As per the Indian Standard IS -8682, 1977, 6 to 10 liters of wastewater is generated per liter of milk processed. At Gokul dairy, the processing capacity is 7lac liters of milk per day with 14000 m³ of wastewater generation per day. This indicates that about 20ltr of wastewater is produced per liter of milk processed. This is double of the standards volume and indicates lot of waste of water.

1.5 Wastewater treatment facility at Gokul Dairy

The treatment scheme is designed on following basis-

- a) **Effluent quantity:** The quantity of combined effluent discharged from the dairy is 1400 m³/day. The peak flow is of 150m³/hr.
- b) **Characteristics of effluent:** The characteristics of raw effluent & treated effluent are presented in the tables given below-


Table no. 1.2 Expected characteristics of untreated effluent:

Sr.	Parameters	Concentration
1.	pH	6.5 to 7.5
2.	Total suspended solids	650 mg/L
3.	BOD	1200 mg/L
4.	COD	2000 mg/L
5.	Oil & Grease	320 mg/L

Table no. 1.3 Desired treated effluent characteristics:

Sr.	Parameters	Concentration
1.	pH	6.5 to 7.5
2.	Total dissolved solids	<2100 mg/L
3.	Total suspended solids	<100 mg/L
4.	BOD	<30 mg/L
5.	COD	<250 mg/L
6.	Oil & Grease	<10 mg/L

Fig. 1.2 Flow Diagram of Effluent Treatment Plant:

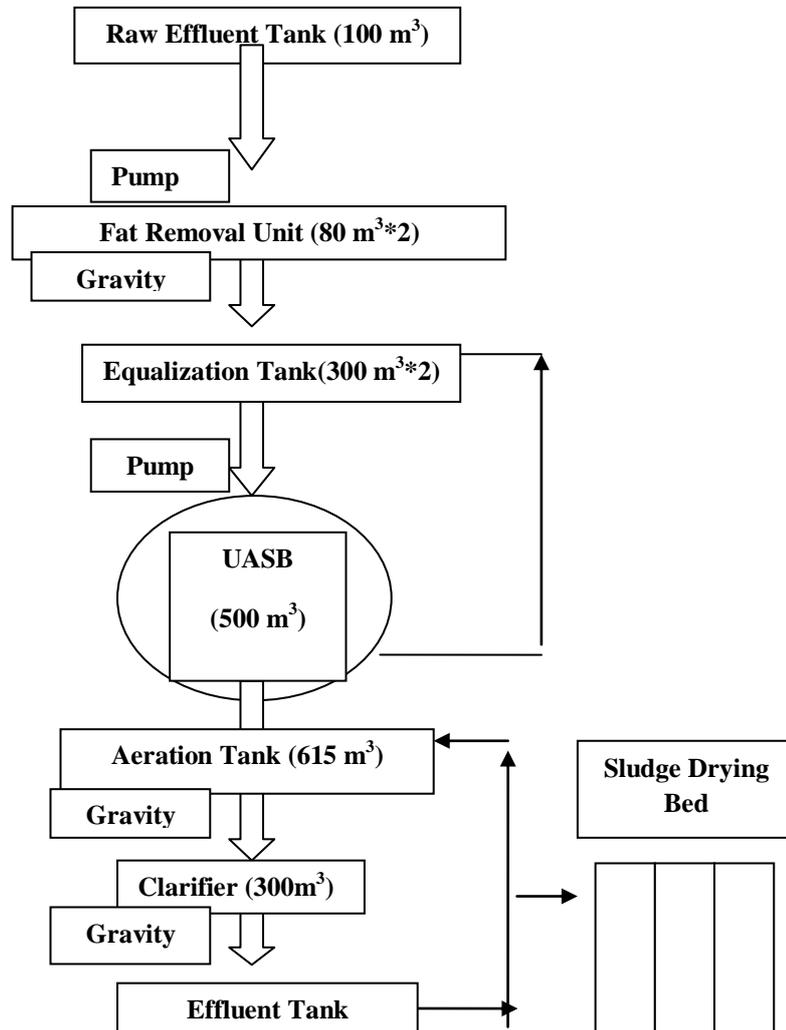

2. Methodology

The objective of the present study is to find potential of aquatic plants as an alternative and cost effective treatment. It is also planned to check the suitability of dairy waste water for floriculture.

2.1.1 Experiment 1:-

To find out characteristics of effluent of dairy, a sample was collected from inlet point of ETP of Gokul Dairy and parameters like pH, alkalinity, COD, DO were analyzed in laboratory.

2.1.2 Experiment 2:-

For the second set of experiment, sample was collected from the equalization tank of ETP. The sample was tested for initial concentration of pH, alkalinity, COD, total solids, dissolved solids. Since COD of sample was found to be 2000mg/lit, which is high. (Munavalli and Salar^[1]). It is found that aquatic plants cannot tolerate organic loading in terms of COD than 1000mg/lit, hence the sample was diluted to 50% with tap water.



Fig no. 2.1.2(a) Reactor with Water hyacinth



Fig no.2.1.2(b) Reactor with Salvinia molesta

2.1.3 Experiment 3:-Waste water from outlet of Up flow Anaerobic Sludge Blanket (UASB) was taken and analyzed for COD which was found to be in the range of 800-1000mg/l. In this experimental setup two tubs were taken. Both the tubs were filled with prepared sample and plants of Water hyacinth were kept in one tub and other one was kept as blank. The samples were monitored for COD, pH, Alkalinity and DO on alternate days.



Fig no. 2.1.3(a) Reactor with Blank hyacinth



Fig no. 2.1.3(b) Reactor with water hyacinth

2.1.4 Experiment 4

Based on results of previous experiments, it was decided to carry out further experiments by aerating the partially treated dairy wastewater [at the outlet of UASB]. For this experiment, wastewater sample was collected and analyzed for DO. The sample then was aerated till DO raised to 4 mg/l. Now this sample was filled in a reactor, all the parameters were analyzed. Water hyacinth plants were kept in prepared sample. Subsequently on alternate days sample from reactor was taken, analyzed. This was continued till COD concentration was below 250 mg/l.



Fig no.2.1.4 Reactor with Water hyacinth

2.1.5 Experiment 5

After getting COD below 200 mg/l, the sample was used for irrigation purpose. Two varieties of marigold flower species are planted in bucket and pour treated wastewater.

In this set up, two buckets were taken and tap was fitted at a distance of about 10cm from the bottom of the bucket. The lower part of bucket was filled with gravel of size ranging between 2.5 cm-3 cm up to height of 15cm from bottom of bucket. Another layer of sand was filled up to height of 15cm and soil was filled over sand layer up to height of 20cm. To prevent leakage from outlet tap it was sealed with M-seal.



Fig no. 2.1.5 Marigolds plants

2.1.6 Experiment 6

In this experiment sample of percolated waste water from the reactor was collected through the tap fitted at the bottom of the reactor. This sample was analyzed for COD, pH and alkalinity.

3. Results and discussion

3.1 Batch 1- Inlet sampling

Analysis results of sample of untreated dairy wastewater at ETP inlet are given below

Table 3.1: Analysis results of sample of untreated dairy wastewater

Parameter	PH	Alkalinity(mg/l)	COD (mg/l)	BOD(mg/l)
Measured value	8.8	790	2100	1200

3.2 Batch 2: (equalization tank sample)

Analysis result of dairy waste water at equalization tank outlet are given below as per table 3.2



Table no- 3.2: Analysis results of equalization sample with 50% dilution

Time	COD (mg/L)			pH			Alkalinity (mg/L)			DO (mg/L)		
	S1	S2	S3	S1	S2	S3	S1	S2	S3	S1	S2	S3
1 st Day	1352	1344	1328	7.77	7.26	8.77	580	560	590	0.94	1.67	0.65
3 rd Day	720	456	824	7.33	7.26	8.3	620	610	630	0.4	.59	0.2
5 th Day	640	328	715	7.26	7.40	7.56	650	690	610	0.254	1.129	0
7 th Day	280	240	608	7.79	7.63	8.31	700	650	640	0.265	1.049	0


S1-water hyacinth

S2-salvinia molesta

S3-blank

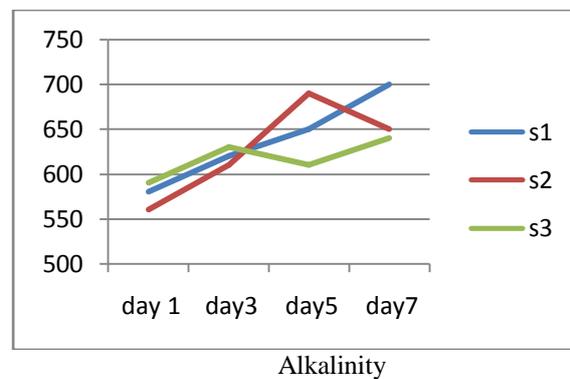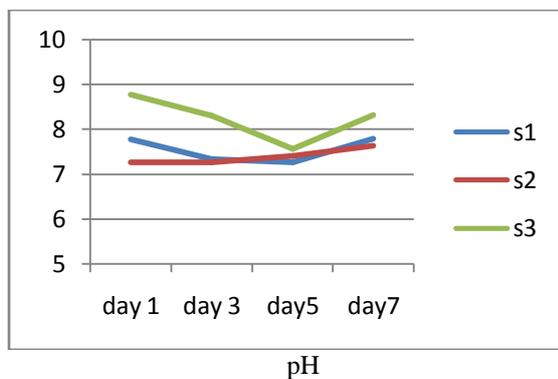

Potential of Phytoremediation for dairy wastewater treatment

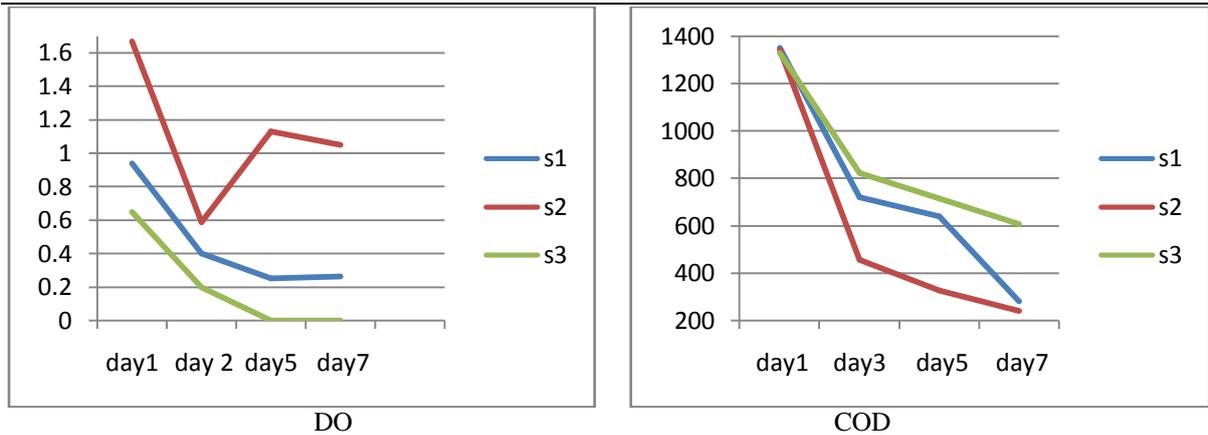


3.3 Batch no 3- UASB outlets (without aeration)

Analysis results of dairy waste water at UASB outlet are given below as per table 3.3.

Table no- 3.3: Analysis results of UASB outlet sample without aeration

Time	COD (mg/L)		Percent removal (%)		pH		DO (mg/L)		alkalinity (mg/L)	
	S1	S2	S1	S2	S1	S2	S1	S2	S1	S2
1th day	784	784	0	0	9.21	9.21	0	0	850	850
3nd day	428	486	45.4	37.91	7.77	7.81	1.5	1.91	410	420

S1-water hyacinth S2-blank

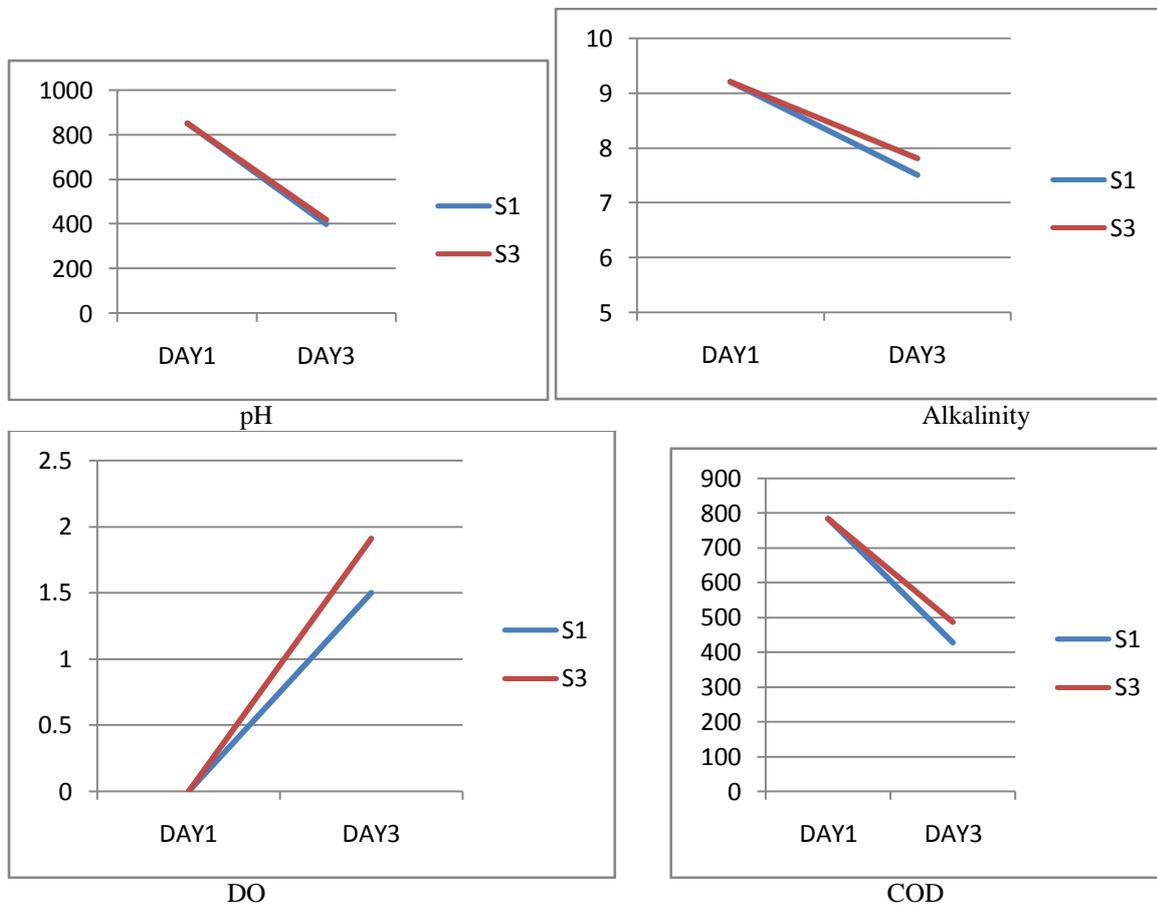


3.4 Batch no 4 - UASB outlet (with aeration)

Analysis results of dairy waste water at UASB outlet are given below as per table 3.4.

Table no- 3.4: Analysis results of UASB outlet sample with aeration

parameters	COD(mg/lit)	DO(mg/lit)	Alkalinity(mg/lit)	pH
Day1	810	0	600	8.3
Day3	412	2.006	730	7.9
Day4	260	1.64	850	7.53
Day5	160	2.05	480	7.04

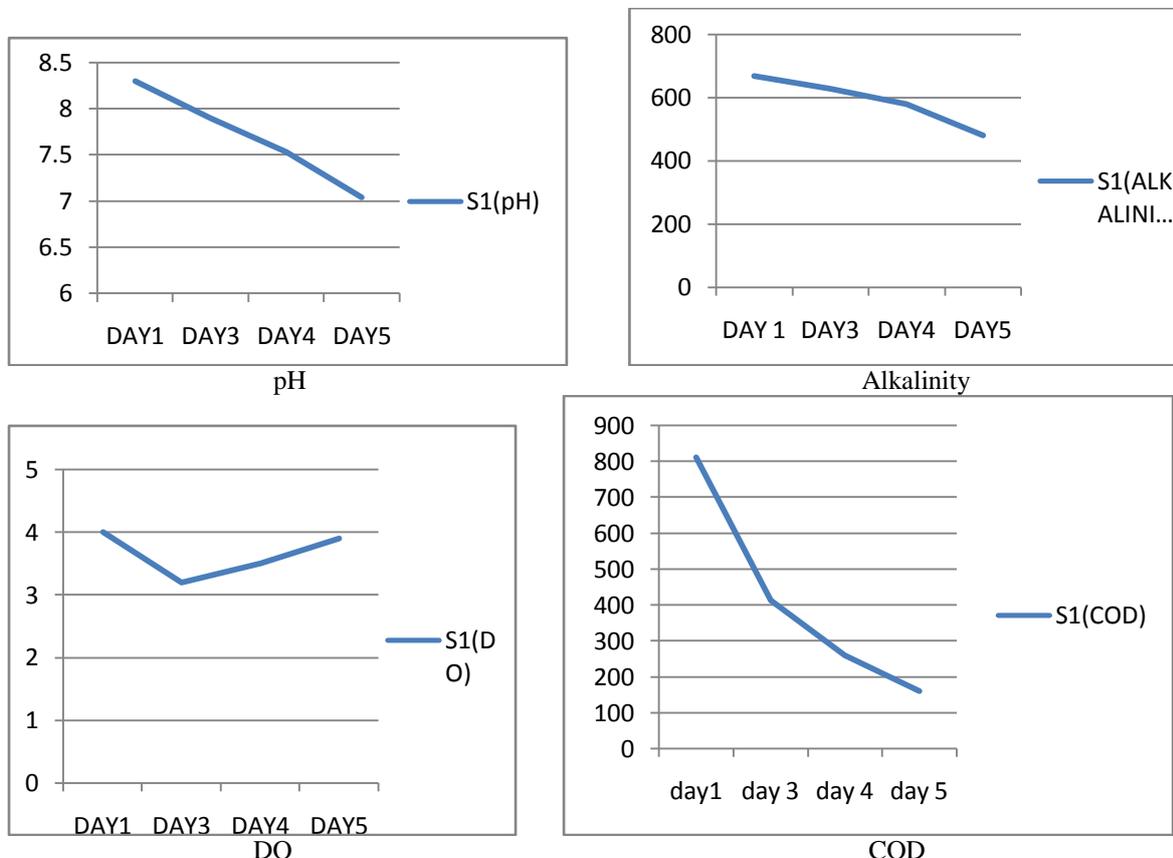

3.5 Batch No.5 (Reactor outlet)

Analysis results of sample of Reactor outlet is given below

Sr.No	Parameters	Measured value
1	COD(mg/lit)	123
2	Alkalinity(mg/lit)	456
3	pH	7.54

4. Conclusion

The present study was aimed at evaluating the potential of aquatic plants for treatment of dairy wastewater and also potential use of treated waste water for irrigation purpose. It was also planned to assess the suitability of such treated waste water for floriculture. In batch experiments, the untreated dairy wastewater samples were kept in a module with water hyacinth, salvinia molesta, duck weed plants and blank. The samples were observed for temporal changes in COD, pH, DO, and Alkalinity.

As the water hyacinth plants were found to be the most suitable for growth in dairy wastewater, the potential of water hyacinth plants for its application as alternate to secondary (biological) treatment system was further evaluated. Since it was observed that water hyacinth system cannot tolerate high initial COD concentration (above 1000mg/l) the further experiments were carried out to evaluate the potential of these plants for treatment of partially treated dairy wastewater. For the present study, the partial treatment given was UASB based on the results and discussions, following observation and conclusions can be drawn.

- a) Water hyacinth and *Salvinia molesta* plants play significant role in COD removal from dairy wastewater compared to duck weed plants and blank (without plants).
- b) The detention time required for initial COD concentration of about 1000mg/l to be brought to below 200 mg/l was above 8 days which is very high. When the waste water volume is high as 1400 m³/day like at Gokul dairy, to provide such high hydraulic retention time (HRT) requires huge land and hence it is uneconomical.
- c) The water hyacinth is the most suitable plants as it can grow in dairy wastewater with high initial COD concentration like 1000-1200 mg/l. When the same organic land was applied to water hyacinth system after raising the initial DO from 0 to 4 mg/l the plant grew very well with significant reduction in term of COD.
- d) The hydraulic retention time(HRT) for water hyacinth based treatment system having initial COD 810 mg/l was found to be 5 days to bring COD level below 200 mg/l which requirement for its utilization for irrigation.

4. REFERENCES

Journals

1. G. R. Munavali and P.S. Saler, "Treatment of dairy wastewater by water hyacinth", *Water Science & tech.* 59,713-722
2. S. Dipu, A. Anju, V. Kumar and Salom Gnana Thanga "Phytoremediation of Dairy Effluent by Constructed Wetland Technology Using Wetland Macrophytes" *The Environmentalist* (2011) Volume: 31, Issue: 3, Pages: 263-278
3. M.F.Abdel-sabour Recycling and Environment consultant "Water hyacinth: available and renewable resource" *Journal Electronic Journal of Environmental, Agricultural and Food Chemistry* 2010 Vol. 9 No. 11 pp. 1746-1759
4. Trevor J. Britz and Corne' van Schalkwyk "Treatment of Dairy Processing Wastewaters" University of Stellenbosch, Matieland, South Africa.
5. J. Vymazal, Czech Academy of Sciences, Dukelsha, "Constructed wetlands for wastewater treatment". [Ecological Studies](#), 2006, Volume 190, Section II, 69-96, DOI: 10.1007/978-3-540-33187-2_5
6. Sooknah, R.D., and Wilkie, A.C.(2004) "Nutrient removal by floating aquatic macrophytes cultured in anaerobically digested flushed dairy manure wastewater", *Ecological Engineering*, 22(1), 27-42.
7. DeBusk, T.A., Peterson, J.E. and Reddy, K.R. (1995), "Use of aquatic and terrestrial plants for removing phosphorus from dairy wastewaters", *Ecological Engineering*, 5(2-3), 371-390.
8. Kambale,S.K. and Patil, M.R.(2001), "Removal of heavy metals from wastewater of thermal power station by water hyacinth", *Indian Journal of Environment Protection*, 21 (7),623-626.
9. Rai, S., Hasan, S.H., Joshi, V.C., Narayanswami, M.S., Rupainwar, D.C., (1993), "Removal of copper (II) from stimulated water by water hyacinth", *Indian Journal of Environment Health*, 35(3), 178-184.